

Silencer

SLGTR




Description

Circular straight silencer with Lindab transfer connection.

Insulation thickness is 100 mm.

For sound attenuation values see SLGU100 documentation.

Dimensions

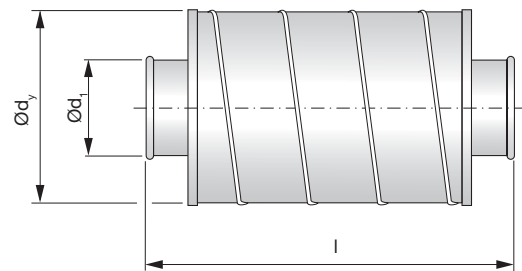

Nominal insulation thickness 50 mm.

Ød ₁ nom	Ød _y mm	Length l mm	Weight kg
80	280	390	4,30
80	280	690	6,40
80	280	990	8,80
100	315	390	4,80
100	315	690	7,50
100	315	990	10,0
125	315	390	5,00
125	315	690	7,70
125	315	990	10,7
125	315	1290	13,3
160	355	390	5,80
160	355	690	8,70
160	355	990	11,8
200	400	690	12,3
200	400	990	17,4
200	400	1290	22,8
250	450	690	13,8
250	450	990	19,8
250	450	1290	25,7

Nominal insulation thickness 100 mm.

Ød ₁ nom	Ød _y mm	Length l mm	Weight kg
315	500	690	16,2
315	500	990	22,0
315	500	1090	25,5
315	500	1290	29,1
400	600	990	28,7
400	600	1290	35,7
500	710	990	35,2
500	710	1290	43,0
630	*	900	60,0
630	*	900	72,0
800	*	1000	77,0
800	*	1000	95,0

* Supplied with flanges, type FL.

Order code

Product	SLGTR	aaa	bbbb
SLGTR			
Connection dim. Ød₁			
390 - 1680 mm			
Length in mm			
390 - 1680 mm			

Example: SLGTR - 125 - 990