

Capped circular duct

SRL



Description


Capped circular duct.

Ducts are always produced locally and can therefore have different thicknesses and other specifications per country.

The ducts can be produced both with and without click function (notches).

Please specify when ordering.

Dimensions

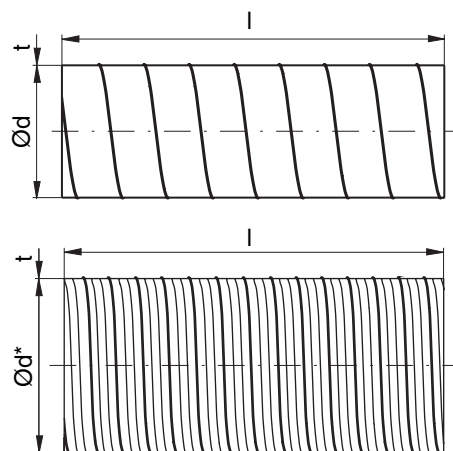

Ød std nom	O πd m	A $\pi d^2/4$ m ²	t std [mm]	l std [mm]	ml std kg/m
63 ¹	0,198	0,003	0,5	3000	0,89
80 ¹	0,251	0,005	0,45	3000	0,91
100 ¹	0,314	0,008	0,45	3000	1,14
112	0,352	0,01	0,45	3000	1,28
125 ¹	0,393	0,012	0,45	3000	1,41
140	0,44	0,015	0,5	3000	1,76
150	0,471	0,018	0,5	3000	1,89
160 ¹	0,503	0,02	0,5	3000	2,02
180	0,565	0,025	0,5	3000	2,26
200 ¹	0,628	0,031	0,5	3000	2,56
224	0,704	0,039	0,5	3000	3,42
250 ^{*1}	0,785	0,049	0,5	3000	3,18
280 [*]	0,88	0,062	0,55	3000	3,92
300 [*]	0,942	0,071	0,55	3000	4,2
315 ^{*1}	0,99	0,078	0,55	3000	4,41
355 [*]	1,115	0,099	0,55	3000	4,96
400 ^{*2}	1,257	0,126	0,55	3000	6,01
450 [*]	1,414	0,159	0,6	3000	7,37
500 ^{*2}	1,571	0,196	0,7	3000	9,54
560 [*]	1,759	0,246	0,7	3000	12,2
600 [*]	1,885	0,283	0,7	3000	13,1
630 ^{*2}	1,979	0,312	0,7	3000	12
710 [*]	2,231	0,396	0,8	3000	15,5
800 ^{*2}	2,513	0,503	0,8	3000	17,4
900 [*]	2,827	0,636	0,9	3000	21,7
1000 ^{*2}	3,142	0,785	0,9	3000	24,1
1120 [*]	3,519	0,985	0,9	3000	27
1250 ^{*2}	3,927	1,227	0,9	3000	30,2

Ordering example

Product	SRL	250	3000	CLIC
Dimension Ød				
Length l				
Type				

* With outturned stiffening corrugations.

¹ With blue plastic caps.


² With transparent plastic hoods.



Capped circular duct

SRL

Technical data

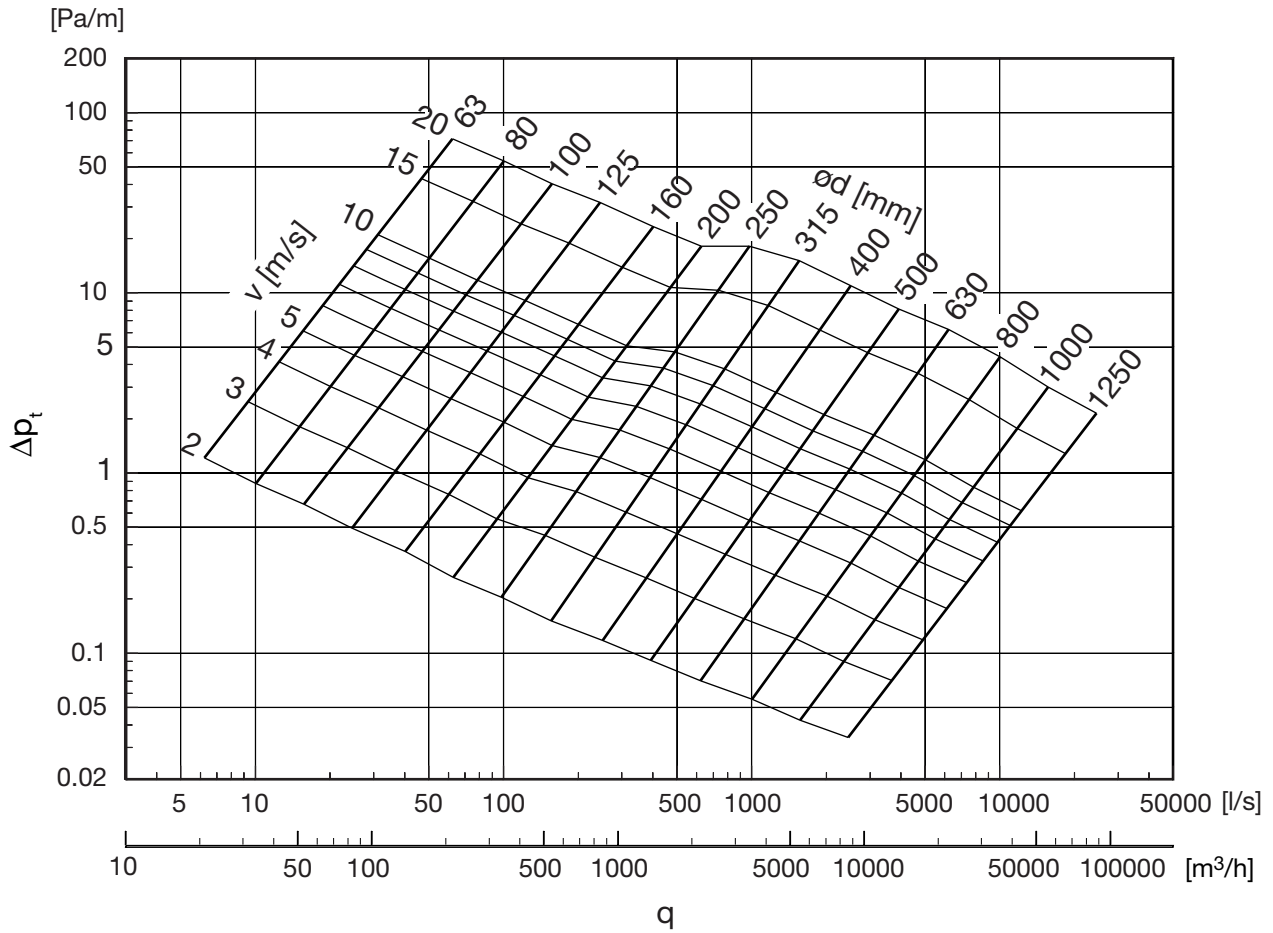

Capped circular duct

SRL

Technical data

Special versions

We can supply ducts with the following special designs:

- In intermediate dimensions, see general information
- Extra tight, with nitrile rubber seal in the fold
- In other sheet metal thicknesses

Extra tight, with fold seal

When extremely good sealing is required in the spiral fold, the ducts can also be supplied with a special rubber seal in the fold.

This seal is very effective at stopping leakage of vegetable oils and greases, and most petroleum products including white spirit.

Other sheet metal thicknesses

If extra stability is needed in ducts, because of high negative pressure etc., they can be supplied with thicker sheet metal than standard. Remember that the thickness increase always reduces the inner diameter. Fittings for such special ducts must be specified separately and sometimes have to be made specially.

Reinforcement corrugations

Ducts of Ø250 mm and above are normally given stiffening corrugations to increase radial stiffness.

Strength

Positive pressure

In case of high positive pressure, the rubber gaskets lips will first start to whistle. At considerably higher pressure, the joints between the ducts will be forced apart. If you manage to fix the connections very well, the ducts will burst at their folds at even higher pressure. The high pressures needed for this to happen are not relevant to ventilation installations.

Negative pressure

In installations with high negative pressure, there is a risk that the ducts could collapse.

This phenomenon is referred to as buckling, and can suddenly happen at the weakest point in the system. Buckling wanders along the duct, which can be completely flattened. The weakest point is frequently a "transport dent" on a duct. For this reason, only use undamaged ducts in systems which are close to the critical pressure!

Sealing

The ability of the rubber gasket to seal is different from these pressures, and is noted on the product overview Safe-system.

